


It is used to discharge the dirt in service water, molten air and gasses. Both the air and dirt are separated from the system with a single product. It is especially very suitable for cooling installation, it should be mounted on return line of the installation. It can be used in cooling installations where static height is up to 5 meters.



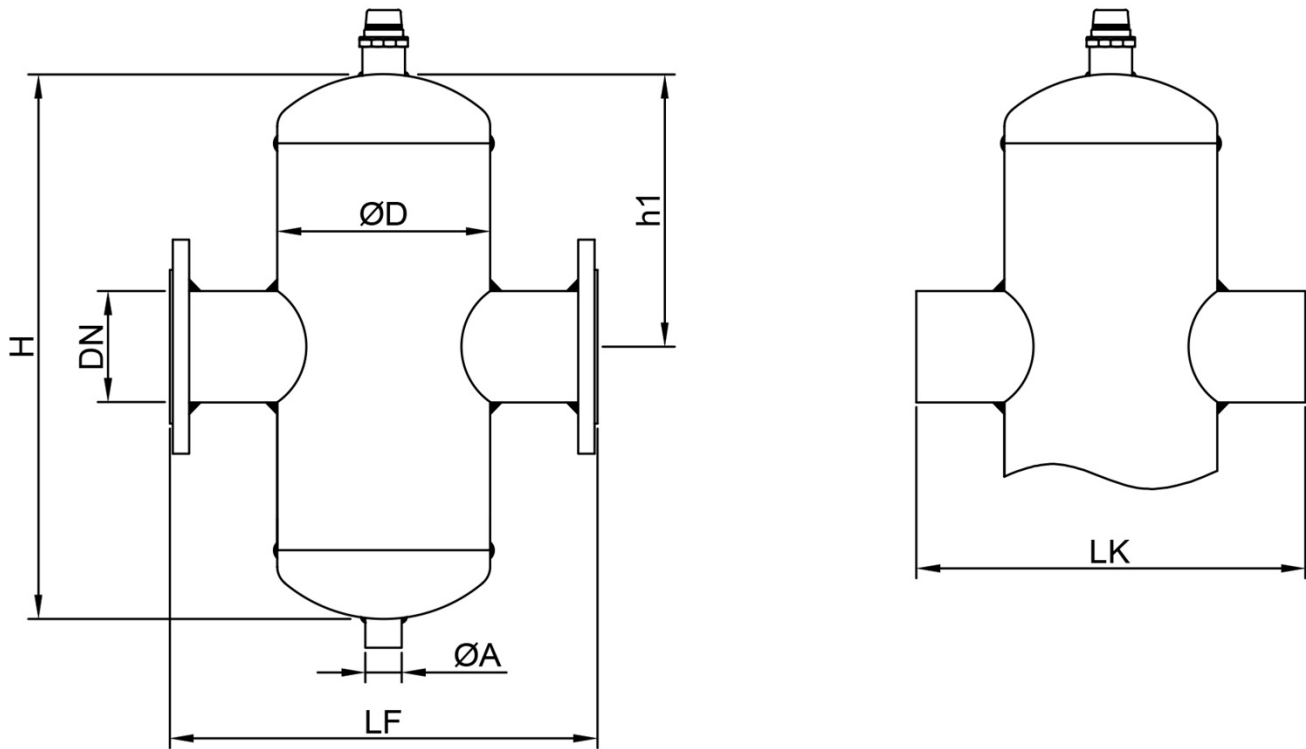

MAXIMUM OPERATING PRESSURE : 10 BAR

MAXIMUM OPERATING TEMPERATURE : 110 °C

HOUSING: CARBON STEEL

Connection Diameter		Dimensions					
DN	Inch	ØD	LK	LF	H	h1	ØA
20	3/4"	88.9	190	240	230	115	1/2"
25	1"	88.9	190	240	230	115	1/2"
32	1 1/4"	88.9	190	240	230	115	1/2"
40	1 1/2"	114.3	225	260	270	135	1/2"
50	2"	114.3	280	280	350	175	1/2"
65	2 1/2"	139.7	315	315	430	215	1/2"
80	3"	168.3	365	365	470	235	1/2"
100	4"	219.1	420	420	490	245	1/2"
125	5"	273	475	475	620	305	1"
150	6"	273	500	500	640	320	1"
200	8"	400	715	715	850	425	1"
250	10"	400	750	750	1000	500	2"
300	12"	500	780	780	1240	620	2"