


Non-Slam Dynamic ARV to be used for the purpose of vacuuming air into the pipe during emptying the pipeline due to maintenance or failure circumstances. In addition, to release small air particules that may occur time to time during operation.

Non-Slam Dynamic ARV is installed to the pipe with a flanged connection. One of the most important feature of Non-Slam Dynamic ARV is that air outlet diameter has the same size with inlet diameter.



| NO | NAME |
|----|--------------------|
| 1 | Body |
| 2 | Cover |
| 3 | Floater Guide |
| 4 | Top cover |
| 5 | Floater |
| 6 | Floater |
| 7 | Small Orifice Seal |
| 8 | Small Orifice |
| 9 | Floater |
| 10 | O-ring |

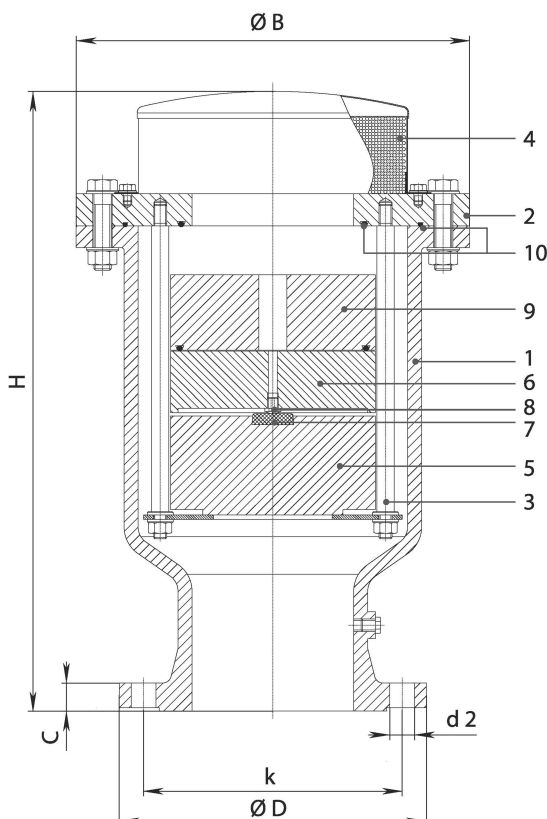

| NO | MATERIAL |
|----|-----------------|
| 1 | Ductile Iron |
| 2 | Stainless steel |
| 3 | Stainless steel |
| 4 | Stainless steel |
| 5 | HDPE |
| 6 | HDPE |
| 7 | EPDM |
| 8 | Stainless steel |
| 9 | HDPE |
| 10 | EPDM |